

SYSTEM RANGE


Domestic range



CHARACTERISTICS AND ADVANTAGES

SYSTEM RANGE

COLOUR AND SHAPE

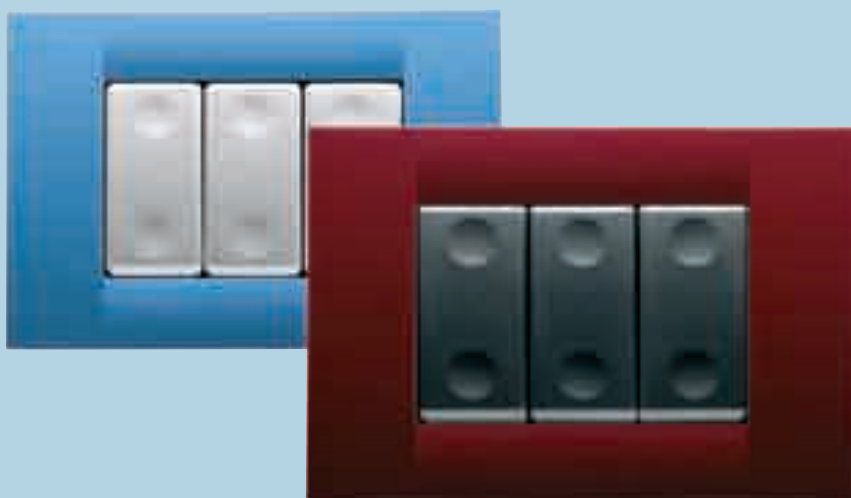

◀ VIRNA

An elegant and linear design in 14 colours.




INCREASED PERFORMANCE

Available in the version 16AX: nominal current 16A also for fluorescent loads with compliance to EN 60 669- and IEC 669-1 laws.

▶ TOP SYSTEM


Soft and rounded lines in 14 colours.

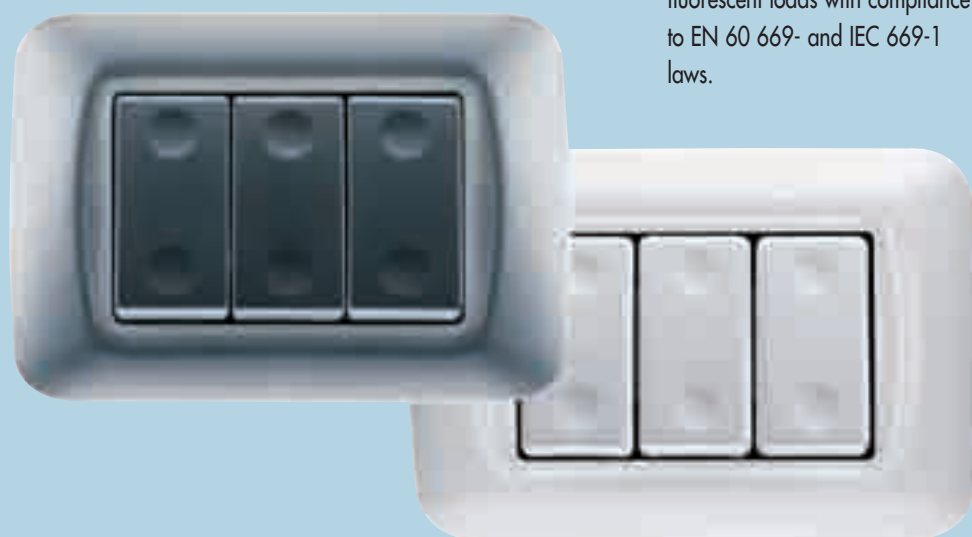

▶ CLASSIC

Plates in pressure die-cast metal in 3 colours.

A COMPLETE AND VERSATILE RANGE

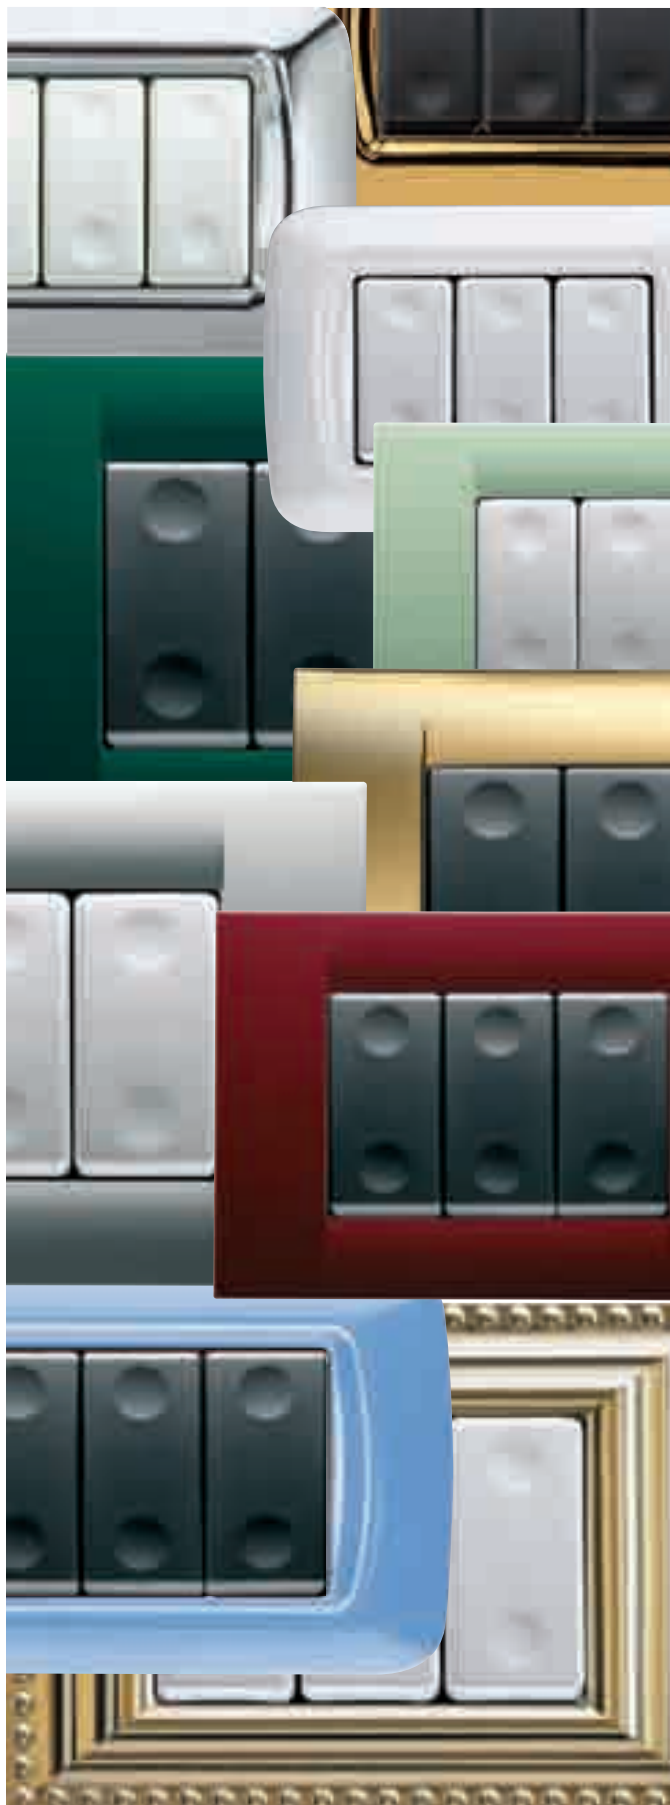

TOP SYSTEM
THE 14 COLOURS



VIRNA
THE 14 COLOURS



CLASSIC



CHARACTERISTICS AND ADVANTAGES

SYSTEM RANGE

IDEAL FOR EVERY ENVIRONMENT



▲
IN THE HOME



▲
IN THE OFFICE



◀
OUTDOORS



IN THE GARAGE ▶


IN THE GARDEN ▶



TECHNICAL SUGGESTIONS



◀ Plan convenient and elegant socket-outlets for the Italian and German standard in all your rooms to be able to use your appliances without the need for the usual adaptors.

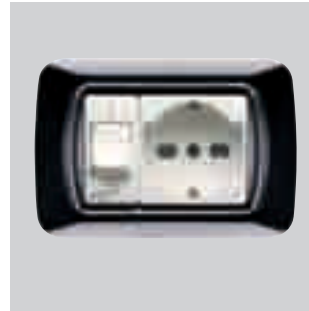

◀ Install socket-outlets with magneto-thermic protection to feed power to your stationary home appliances with high consumption in total safety.



◀ Guarantee the safety of daily use of small home appliances by using the smart socket-outlet, Sicursystem.

Command your system without any limits: the wireless circuit breaker System RF can also be installed on decor and locks.



◀ To be ready for your new DTT and satellite TV just install a telephone socket-outlet along with the TV/SAT socket-outlets.



◀ In safety without undermining the design of your rooms with integrated gas detectors in the domestic range.




◀ To be able to move around safely in the dark, install removable anti-black-out lamps in all your rooms.

CHARACTERISTICS AND ADVANTAGES

SYSTEM RANGE

FLEXIBILITY


The maximum application flexibility by using a universal system, appropriate both for surface and for flush-mounting, in all indoor and outdoor environments.

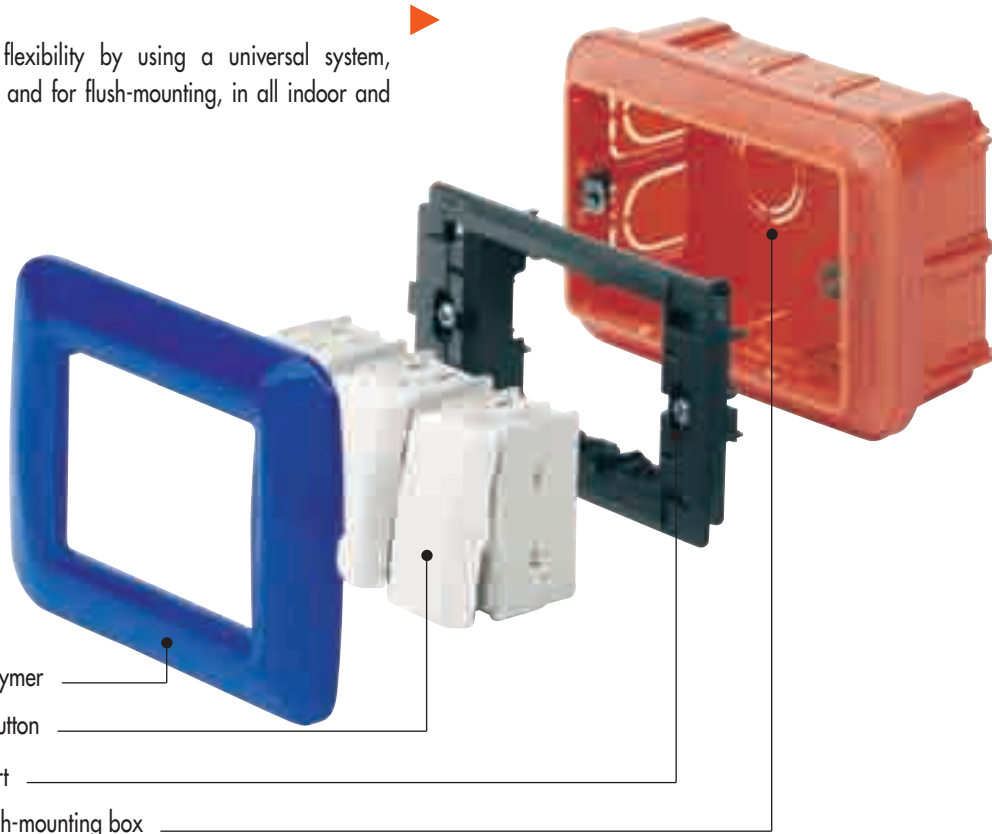

- Plate in technopolymer
- Ergonomic pushbutton
- Adjustable support
- High capacity flush-mounting box

INTEGRATION

Total integration with the 27 COMBI RANGE which proposes a wide range of enclosures for all installation needs in watertight systems in full view, for gardens and for combined applications for protection and distribution.

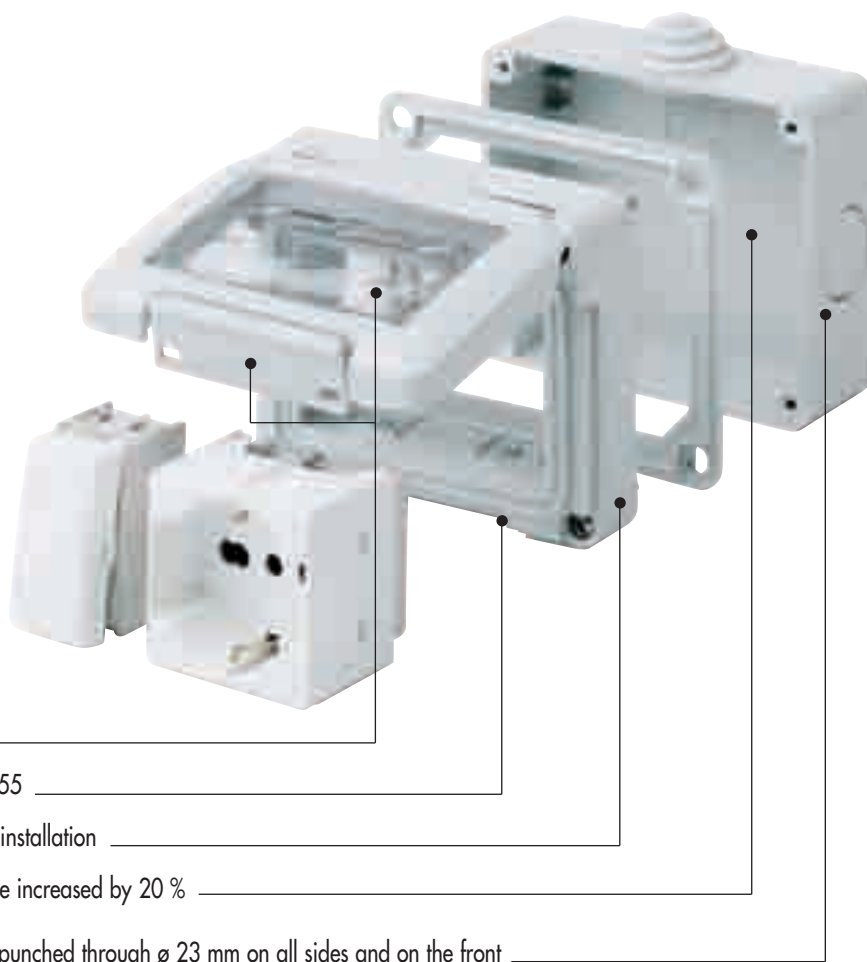


- Ergonomics
- IP protection class IP55
- Practical front cover installation
- Interior storage space increased by 20 %
- Holes which can be punched through \varnothing 23 mm on all sides and on the front

SYSTEM SOLUTIONS


IN RECTANGULAR FLUSH-MOUNTING BOX



IN LIGHT WALLS OR HOLLOWSPACE



IN WATERTIGHT PLATE IP 55



IN A RECTANGULAR FLUSH-MOUNTING BOX WITH A DEEP LID TO INTERFACE WITH MINI TRUNKING



ON SECTIONAL WALLS



IN A SURFACE-MOUNTING BOX




IN A TABLE CONSOLE



IN DEVICE BOXES FOR MINI TRUNKING AND TRUNKING



IN DEVICE TRUNKING

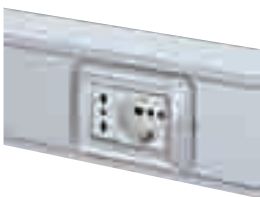

IN TRUNKING USED AS SKIRTING AND FRAME



IN CONVERSION ADAPTORS



ON A SUPPORT FOR DIN EN 50022 RAIL



IN THE 27 COMBI RANGE ENCLOSURES



IN A WATERTIGHT COVER

