

Dedalo

UNMISTAKABLE DESIGN, AESTHETIC SOLUTIONS

Floodlights in die-cast aluminium with reflector in aluminium drawn and metallised in a vacuum with pure aluminium IP 66.

Etched tempered glass, silicone seals.

The optics compartment can be directed on the vertical and horizontal axis and locked mechanically.

Goniometric scale on the horizontal axis. Stainless Steel screws and bolts. Protection against corrosion is guaranteed by Alodine 1200 through chromate treatment and by the polyester powder coating for outdoors in graphite grey finishing.




DEDALO RANGE

DECORATIVE FLOODLIGHTS FOR INSIDE

GEWISS

CHARACTERISTICS AND ADVANTAGES

DEDALO RANGE



IP66



IK08 5J



ORIENTATION

The device can be directed on both the horizontal and vertical axes. Aiming is ensured by the mechanical tightness of two steel dowels



AIMING PRECISION

The graduated goniometric scale stamped on the bracket makes aiming extremely accurate and exact.


CLASS II

The double level of protection ensured by class II insulation does not require earthing.



CONVENIENT ADJUSTMENT OF THE LAMP'S FOCUS

Possibility of adjust the opening of the beam of light from 6° to 30° from outside so as to change the light distribution based on different needs.

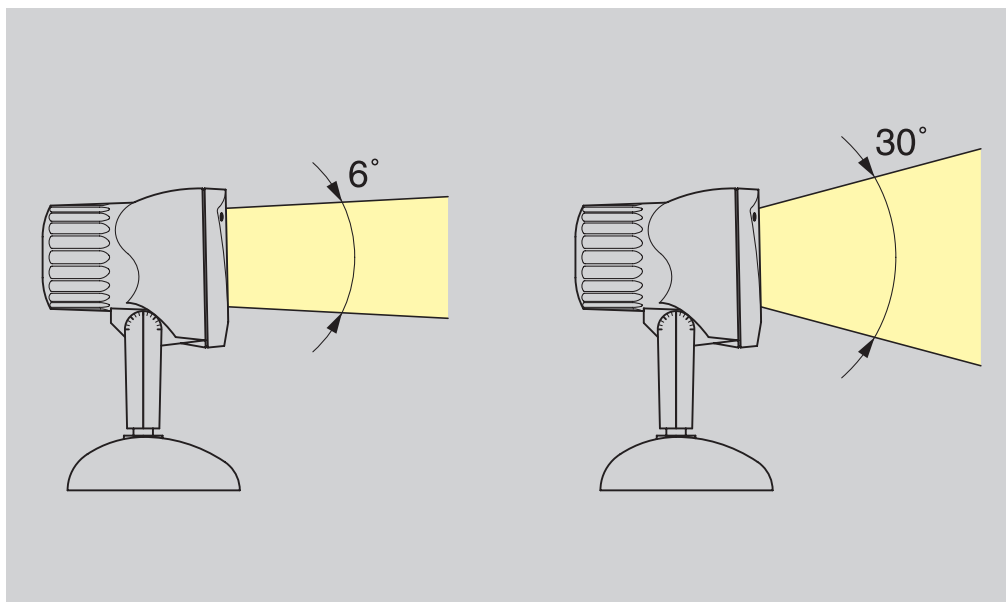

INSTALLATION FLEXIBILITY

The offer of complementary items, like the spacer and stake for the ground, make positioning and assembly of the device quick and simple in a wide variety of installation situation.