

# NP 44/52 RANGE

PVC SILL-TYPE AND DEVICE-MOUNTING TRUNKING SYSTEMS




## TECHNICAL CHARACTERISTICS

### FB- MULTIFUNCTIONAL TRUNKING AND DEVICE HOLDERS IN PVC

IP 40 for surface-mounting  
 IP 20 for suspension-mounting  
 Compliance with standards: CEI 23-32  
 Material: PVC  
 Characteristics: with cover that can be removed only with a tool;  
 Installation temperature: from -5 to +60 °C  
 Insulation resistance: 100 M  
 Self-extinguishing performance: less than 30 seconds  
 Impact resistance 6 J


Application: for distribution of electric power and telecommunication signals (telephone, LAN networks) in the commercial sector.  
 Installation type: surface and suspension

#### MULTIFUNCTIONAL PVC TRUNKING AND DEVICE-HOLDERS (NP 50 002-TYPE)

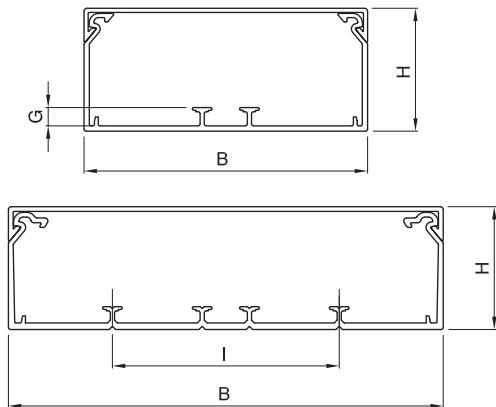


FB	CROSS-SECTION mm <sup>2</sup>	B	H	G	I
100x60	4780	100	65	10	-
130x60	6300	130	65	10	-
150x60	7320	150	65	10	-
200x60	9660	197	65	9	100

#### DIVIDERS FOR TRUNKING AND DEVICE HOLDERS

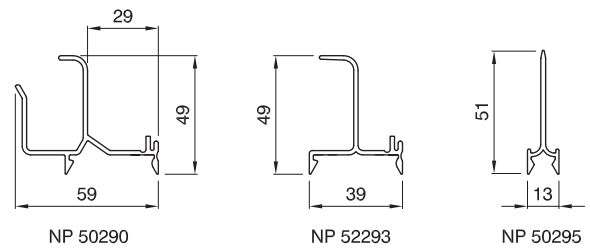

#### EXAMPLES OF MULTIFUNCTIONAL TRUNKING DIVISION

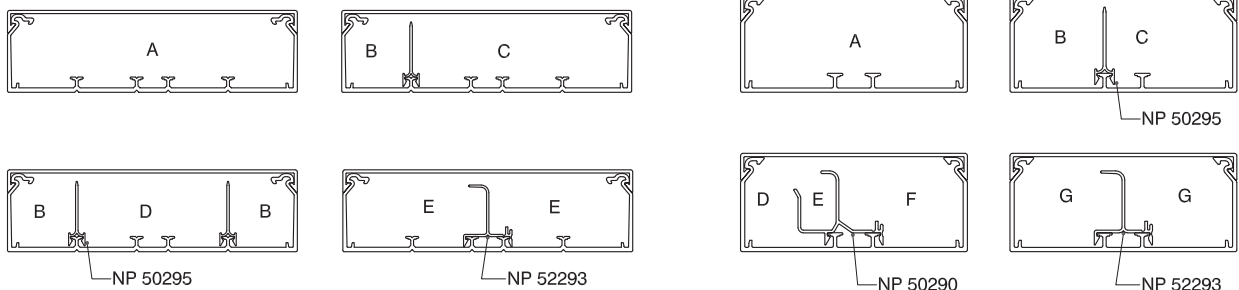

FB	CROSS-SECTION mm <sup>2</sup>							
	A	B	C	D	E	F	G	H
100x60	4780	1650	2900	600	800	2500	2100	1000
130x60	6300	2380	3640	1200	800	3300	2840	1000
150x60	7320	2850	4100	1500	800	3750	3320	1000
200x60	9660	2100	7150	4800	4500	2100	-	-

NP 44/52 RANGE

# NP 44/52 RANGE

PVC SILL-TYPE AND DEVICE-MOUNTING TRUNKING SYSTEMS




## TECHNICAL CHARACTERISTICS

### NF- T PVC TRUNKING

IP 40 for surface-mounting  
 IP 20 for suspension-mounting  
 Compliance with standards: CEI 23-32  
 Material: PVC  
 Characteristics: self-extinguishing; in less than 30 seconds  
 Impact resistance: 6J  
 Installation temperature: -5 +60 °C  
 Insulation resistance: 100 MΩ


Application: to create main and/or backbone circuits in the commercial and industrial sector.  
 Installation type: surface and suspension

#### PVC TRUNKING ( NP 44 002-TYPE)




NF	CROSS-SECTION mm <sup>2</sup>	B	H
25x25	360	25	25
30x30	580	30	30
40x40	1100	40	40
60x40	1550	57	40
90x40	2480	90	40

#### ADAPTOR FOR 10° FLUSH-MOUNTING INDUSTRIAL SOCKETS




CODE	PLATE	COLOUR
NP 50 692	85x75	RAL 9010 white
NP 50 299	85x75	RAL 7035 grey

#### IP 40 12-GANG ENCLOSURE WITH TRANSPARENT DOOR FOR CABLE TRUNKING AND DEVICE-HOLDER SYSTEMS




CODE	COVER HEIGHT	RANGE	COLOUR
NP 50 715	130	FB-PVC	RAL 9010 white
NP 50 716	150	FB-PVC	RAL 9010 white
NP 50 717	200	FB-PVC	RAL 9010 white
NP 50 320	130	FB-PVC	RAL 7035 grey
NP 50 321	150	FB-PVC	RAL 7035 grey
NP 50 322	200	FB-PVC	RAL 7035 grey


#### DEVICE-HOLDER BOXES



NP 50 302



NP 50 305



NP 50 307

CODE	NO. GANGS	COLOUR
NP 50 302	3	Red
NP 50 305	2	Red
NP 50 307	4	Green