


GENIUS RANGE

MULTIFUNCTION FLOODLIGHTS FOR FIXED OR MOVABLE USE

GEWISS

GENIUS RANGE

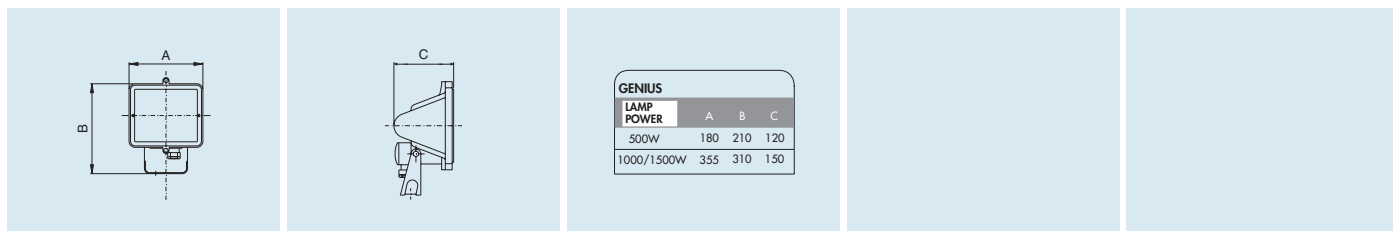

FIXED APPLICATIONS - SYMMETRICAL DIFFUSED OPTICS

FLOODLIGHTS - IP55 - CLASS I

GW84201



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 201	500 W	HD	R7s	2.1 A	Graphite grey	1.1	1/12
GW 84 215	500 W	HD	R7s	2.1 A	White	1.1	1/12
GW 84 202	1000 W	HD	R7s	4.3 A	Graphite grey	3	1
GW 84 216	1000 W	HD	R7s	4.3 A	White	3	1
GW 84 203	1500 W	HD	R7s	6.5 A	Graphite grey	3	1
GW 84 217	1500 W	HD	R7s	6.5 A	White	3	1

CHARACTERISTICS: GW84201 - GW84215 also suitable for 200 W - 300 W - 400 W lamps.
GW84202 - GW84216 also suitable for 750 W lamps.

FLOODLIGHTS WITH INFRARED DETECTOR - IP54 - CLASS I

GW84218



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 218	500 W	HD	R7s	2.1 A	Graphite grey	1.2	1/6
GW 84 219	500 W	HD	R7s	2.1 A	White	1.2	1/6

ACCESSORIES SUPPLIED: passive directional detector (30° vertically - 160° horizontally) with adjustment of switching-on time (from 10 to 300 seconds) and tripping sensitivity (from 5 to 50 lux).

CHARACTERISTICS: GW84201 - GW84215 also suitable for 200 W - 300 W - 400 W lamps.

PORTABLE APPLICATIONS - SYMMETRICAL DIFFUSED OPTICS

FLOODLIGHTS ON YELLOW TUBULAR SUPPORT - IP55 - CLASS I

GW84205



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 204	500 W	HD	R7s	2.1 A	Graphite grey	2.7	1
GW 84 205	1000 W	HD	R7s	4.3 A	Graphite grey	4.5	1

CHARACTERISTICS: protective wire guard and cable type H07RN-F section 3x1.5 mm², length 5 m with plug IEC 309 16 A 2P+E 200-250V - IP67.
GW84204: also suitable for 200 W - 300 W - 400 W lamps; GW84205: also suitable for 750 W lamps.

FLOODLIGHTS ON TELESCOPIC ADJUSTABLE YELLOW SUPPORT (MIN. 1 M / MAX 1.4 M) - IP55 - CLASS I

GW84220



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 220	500 W	HD	R7s	2.1 A	Graphite grey	3.7	1

CHARACTERISTICS: protective wire guard and cable type H07RN-F section 3x1.5 mm², length 5 m with plug IEC 309 16 A 2P+E 200-250V - IP67.
Also suitable for 200 W - 300 W - 400 W lamps.

COMPLEMENTARY ITEMS



COMPLEMENTARY ITEMS FOR INSTALLATION

Code	Description	Suitable for	Dimension (mm)	Weight (Kg)	Pack Carton
GW 84 213	Protective wire guard	500W	180x150	0.1	5
GW 84 214	Protective wire guard	1000/1500 W	350x220	0.2	5
GW 84 221	Barn door shutter	500W	300x340	0.3	5
GW 84 222	Anti-glare louvre	1000/1500W	340x215	0.4	5
GW 84 223	Spike	500W	255x30	0.1	5

SPARE PARTS

Code	Description	Suitable for	Dimension (mm)	Weight (Kg)	Pack Carton
GW 88 202	Glass	500W	150x180	0.2	1/5
GW 88 223	Glass	1000W	350x220	0.9	1/5
GW 88 203	Glass	1500W	350x220	0.9	1/5