


STANDARD OPTIC

OPEN OPTIC



GW84101Q



WIRED VERSIONS WITH P.F. CORRECTION COMPLETE WITH LAMP - IP23 - CLASS I



Code	Lamp power	Lamp supplied	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 84 101 Q	125 W	QE	E27	1.15 A	Graphite grey	4.2	1
GW 84 102 Q	250 W	QE	E40	2.2 A	Graphite grey	5.2	1
GW 84 103 Q	400 W	QE	E40	3.2 A	Graphite grey	6.4	1
GW 84 104 S	250 W	SE	E40	3 A	Graphite grey	6.6	1
GW 84 104 M	250 W	ME	E40	3 A	Graphite grey	6.6	1
GW 84 105 M	250 W	ME*	E40	2.2 A	Graphite grey	5.4	1
GW 84 106 S	400 W	SE	E40	4.2 A	Graphite grey	7.9	1
GW 84 106 M	400 W	ME	E40	4.2 A	Graphite grey	7.9	1
GW 84 107 M	400 W	ME*	E40	3.4 A	Graphite grey	6.4	1

* Lamp with striking voltage of 0.7 ÷ 1KV.

NOTE: the versions supplied with ME - 250 W / 400 W metal iodide lamps must be complete with the protection screen (glass) as required by the type of lamp installed.

GW84121




NON-WIRED VERSIONS



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 121	400 W		E40		Graphite grey	2.8	1
GW 84 122	125 W		E27		Graphite grey	2.7	1

COMPLEMENTARY ITEMS

GW84814




COMPLEMENTARY ITEMS FOR INSTALLATION

Code	Description	Dimension (mm)	Weight (Kg)	Pack Carton
GW 84 982	IP44 kit with glass		2.9	1/4
GW 84 820	Tempered glass	Ø 470 x h 4	1.7	1
GW 84 814	Protective wire guard	Ø 475 x h 50	0.3	5
GW 84 818	Cup closing trim	Ø 475 x h 15	0.2	25

NEW

STRIPED OPTICS

OPEN OPTIC



GW84880Q

HERCULES RANGE

WIRED VERSIONS WITH P.F. CORRECTION COMPLETE WITH LAMP

- IP23 - OPTICS COMPARTMENT AND ACCESSORIES COMPARTMENT - CLASS I



Code	Lamp power	Lamp supplied	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 84 880 Q	125 W	QE	E27	1.15 A	Grey RAL 7035	4.2	1
GW 84 881 Q	250 W	QE	E40	2.2 A	Grey RAL 7035	5.2	1
GW 84 882 Q	400 W	QE	E40	3.2 A	Grey RAL 7035	6.4	1
GW 84 883 S	250 W	SE	E40	3 A	Grey RAL 7035	6.6	1
GW 84 883 M	250 W	ME	E40	3 A	Grey RAL 7035	6.6	1
GW 84 886 M	250 W	ME*	E40	2.2 A	Grey RAL 7035	5.4	1
GW 84 885 S	400 W	SE	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 885 M	400 W	ME	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 887 M	400 W	ME*	E40	3.4 A	Grey RAL 7035	6.4	1
VOLTAGE: 240 V - 50 Hz							
GW 84 890 Q	125 W	QE	E27	1.15 A	Grey RAL 7035	4.2	1
GW 84 891 Q	250 W	QE	E40	2.2 A	Grey RAL 7035	5.2	1
GW 84 892 Q	400 W	QE	E40	3.2 A	Grey RAL 7035	6.4	1
GW 84 893 S	250 W	SE	E40	3 A	Grey RAL 7035	6.6	1
GW 84 893 M	250 W	ME	E40	3 A	Grey RAL 7035	6.6	1
GW 84 896 M	250 W	ME*	E40	2.2 A	Grey RAL 7035	5.4	1
GW 84 895 S	400 W	SE	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 895 M	400 W	ME	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 897 M	400 W	ME*	E40	3.4 A	Grey RAL 7035	6.4	1
VOLTAGE: 220 V - 60 Hz							
GW 84 900 Q	125 W	QE	E27	1.15 A	Grey RAL 7035	4.2	1
GW 84 901 Q	250 W	QE	E40	2.2 A	Grey RAL 7035	5.2	1
GW 84 902 Q	400 W	QE	E40	3.2 A	Grey RAL 7035	6.4	1
GW 84 903 S	250 W	SE	E40	3 A	Grey RAL 7035	6.6	1
GW 84 903 M	250 W	ME	E40	3 A	Grey RAL 7035	6.6	1
GW 84 906 M	250 W	ME*	E40	2.2 A	Grey RAL 7035	5.4	1
GW 84 905 S	400 W	SE	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 905 M	400 W	ME	E40	4.2 A	Grey RAL 7035	7.9	1
GW 84 907 M	400 W	ME*	E40	3.4 A	Grey RAL 7035	6.4	1

* Lamp with 0.7 ÷ 1KV striking voltage.

NOTE: the versions supplied with ME - 250 W / 400 W metal iodide lamps must be complete with the protection screen (glass or cup) as required by the type of lamp installed.

GW84873



NON-WIRED VERSIONS




Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 84 873	400 W		E40		Grey RAL 7035	2.8	1
GW 84 878	125 W		E27		Grey RAL 7035	2.7	1

The optics compartment can be given a protection rating of IP44 by mounting the special kit (GW84981 - GW84982).

ACCESSORIES SUPPLIED: structural components: reflector, accessory-holding plate. Electrical components: lampholder with cables, supply terminal. Devices are supplied with standard service items.

COMPLEMENTARY ITEMS

GW84814




COMPLEMENTARY ITEMS FOR INSTALLATION

Code	Description	Dimension (mm)	Weight (Kg)	Pack Carton
GW 84 982	IP44 kit with glass		2.9	1/4
GW 84 981	IP44 kit with PC bowl (max 250 W)		1.2	1/4
GW 84 984	IP44 kit with PMMA bowl (max 250 W)		1.2	1/4
GW 84 820	Tempered glass	Ø 470 x h 4	1.7	1
GW 84 819	PC Bowl	Ø 470 x h 45	0.4	25
GW 84 983	PMMA Bowl (max 250 W)	Ø 470 x h 45	0.4	25
GW 84 814	Protective wire guard (max 250 W)	Ø 475 x h 50	0.3	5
GW 84 818	Cup closing trim	Ø 475 x h 15	0.2	25

CHARACTERISTICS: GW84814, clip fixing. GW84981 consists of PC bowl, trim, plate. GW84982 consists of glass, trim and lampholder protection plate.

TRANSPARENT OPTICS

OPEN OPTIC



WIRED VERSIONS WITH P.F. CORRECTION COMPLETE WITH LAMP

- IP23 - OPTICS COMPARTMENT AND ACCESSORIES COMPARTMENT - CLASS I



GW85891Q




HERCULES RANGE

Code	Lamp power	Lamp supplied	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
VOLTAGE: 230 V - 50 Hz							
GW 85 891 Q	125 W	QE	E27	1.15 A	Grey RAL 7035	4.2	1
GW 85 892 Q	250 W	QE	E40	2.2 A	Grey RAL 7035	5.2	1
GW 85 893 Q	400 W	QE	E40	3.2 A	Grey RAL 7035	6.4	1
GW 85 894 S	250 W	SE	E40	3 A	Grey RAL 7035	6.6	1
GW 85 894 M	250 W	ME	E40	3 A	Grey RAL 7035	6.6	1
GW 85 895 M	250 W	ME*	E40	2.2 A	Grey RAL 7035	5.4	1
GW 85 896 S	400 W	SE	E40	4.2 A	Grey RAL 7035	7.9	1
GW 85 896 M	400 W	ME	E40	4.2 A	Grey RAL 7035	7.9	1
GW 85 897 M	400 W	ME*	E40	3.4 A	Grey RAL 7035	6.4	1

* Lamp with 0.7 ÷ 1KV striking voltage.

The versions supplied with ME - 250 W / 400 W metal iodide lamps must be complete with the protection screen (glass or cup) as required by the type of lamp installed.


OPEN OPTIC

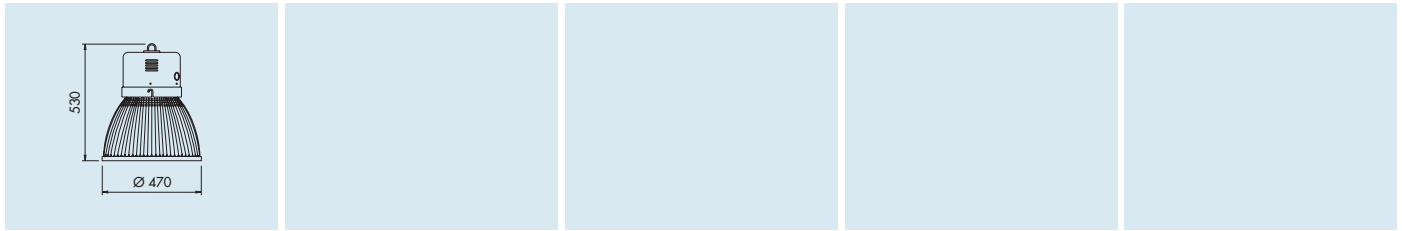

GW85934



NON-WIRED VERSIONS



Code	Max. lamp power	Lamp type	Lamp holder	Lamp current	Colour	Weight (Kg)	Pack Carton
GW 85 934	125 W		E27		Grey RAL 7035	2.7	1
GW 85 933	400 W		E40		Grey RAL 7035	2.8	1

ACCESSORIES SUPPLIED: structural components: reflector, accessory-holding plate. Electrical components: lampholder with cables, supply terminal. Devices are supplied with standard service items.

GW83537



COMPLEMENTARY ITEMS FOR INSTALLATION

Code	Description	Dimension (mm)	Weight (Kg)	Pack Carton
GW 83 537	Kit bowl PMMA	Ø 470 x h 45	0.6	1