

Floodlight luminaire 230 V

Shape and Type of lamp		Fluorescent (W)								Halogen (W)				Discharge lamps						
														35W		70W				
	ME ellipse metal halides																			
	MT tubular metal halides													35	70					
	MD double connection metal halides															70				
	MN metal halides with cable																			
	SE ellipse high pressure sodium																			
	ST tubular high pressure sodium																70			
	SD double connection high pressure sodium																		70	
	QE mercury vapour																			
	Fluorescent	2x18	4x18	1x32	2x32	1x42	2x42	1x120W 3000°k	1x120W 4000°k											
	HS double-spined halogen									50	75	100								
	HD double connection halogen											500	1000	1500						
Symmetrical optics	Genius 	Graphite grey																		
		White																		
		Graphite grey infrared sensors																		
		White infrared sensors																		
		On the graphite grey tubular support																		
		On the white tubular support																		
Symmetrical optics	Mercurio 	Graphite grey																	GW 84 011M GW 84 012S GW 84 011S	
		Aluminium																	GW 85 015M GW 84 016S GW 84 015S	
	Horus 	Horus 1 diffused optics	GW 85 306		GW 85 367		GW 85 366													GW 85 302M GW 85 302S
		Horus 2 diffused optics		GW 85 016		GW 85 067		GW 85 066												GW 85 001M GW 85 003M GW 85 001S
		Horus 3 diffused optics							GW 85 109F	GW 85 110F										
		Horus 3 restricted beam optics																		
Titano 	Titano diffused optics																			
	Titano restricted beam optics																			
Colosseum 	Colosseum diffused optics																			
	Colosseum restricted beam optics																			
Stadium 	Stadium diffused optics																			
	Stadium restricted beam optics																			
Asymmetrical optics	Mercurio 	Graphite grey																	GW 84 031M GW 84 031S	
		Aluminium																	GW 84 033M GW 84 033S	
	Urano 	Urano graphite grey																		GW 84 206M GW 84 206S
		Urano aluminium																		GW 84 131M GW 84 131S
		Urano white																		GW 84 226M GW 84 226S
	Horus 	Horus 1 diffused optics																		GW 85 301M GW 85 301S
Horus 2 diffused optics																			GW 85 001M GW 85 002S GW 85 001S	
Horus 3 diffused optics																				
Horus 3 restricted beam optics																				
Titano 	Titano diffused optics																			
	Titano restricted beam optics																			
Colosseum 	Colosseum diffused optics																			
	Colosseum restricted beam optics																			
Circular beam	Decdalo 	Adjustable beam 6°-30°									GW 84 387	GW 84 389	GW 84 374						GW 84 347 GW 84 347	
		Graphite grey																		GW 84 041M GW 84 043M
Circular beam	Mercurio 	Aluminium																	GW 85 051M GW 85 051S	
		Circular optics 8°																		
Special optics	Colosseum 	Restricted beam optics 8°																		
		Semi restricted beam optics 25°																		
		Diffused optics 40°																		
		Hot restrike restricted beam optics 8°																		
		Hot-restrike semi restricted beam optics 25°																		
		Hot-restrike diffused optics 40°																		

* Lamp with 0.7 ÷ 1 kV striking voltage.

DEDALO RANGE


DECORATIVE FLOODLIGHTS FOR OUTSIDE AND INSIDE



SELECTION GUIDE


DEDALO RANGE

NARROW BEAM

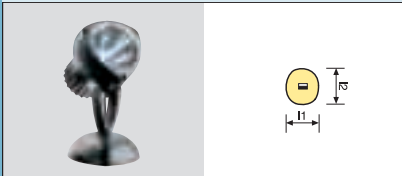


Distance	L1 x L2	E max	E med.	Uniformity
----------	---------	-------	--------	------------

WIDE BEAM

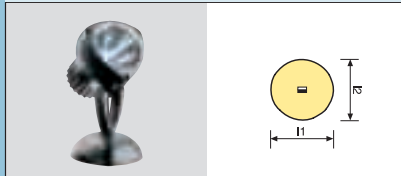


Distance	L1 x L2	E max	E med.	Uniformity
----------	---------	-------	--------	------------

FRESNEL LENS

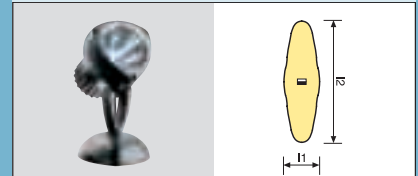


Distance	L1 x L2	E max	E med.	Uniformity
----------	---------	-------	--------	------------


100W HALOGEN

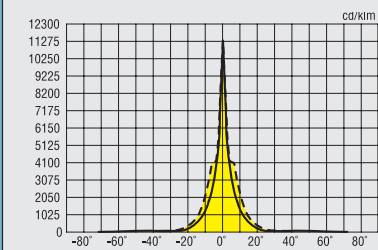

5m	1.5 x 1.5	218	161	0,74
----	-----------	-----	-----	------

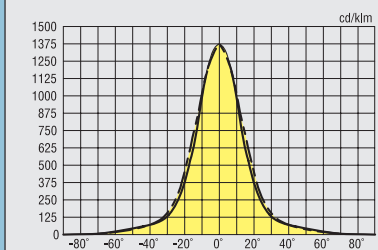


5m	2.5 x 2.5	64	41	0,63
----	-----------	----	----	------

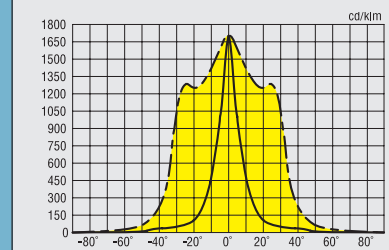


5m	1.5 x 6	120	91	0,76
----	---------	-----	----	------


75W 12V HALOGEN

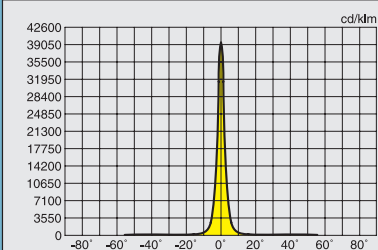

5m	1 x 1	411	308	0,7
----	-------	-----	-----	-----

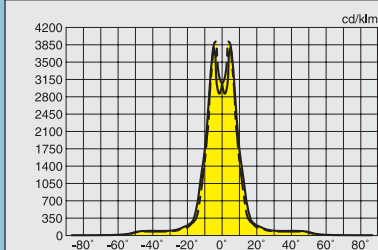


5m	2 x 2	192	109	0,54
----	-------	-----	-----	------

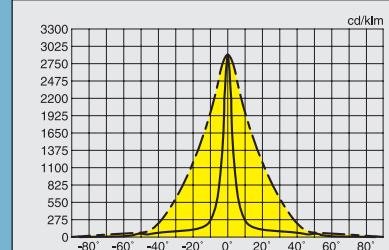


5m	1 x 4	88	66	0,75
----	-------	----	----	------


70W METAL IODIDES

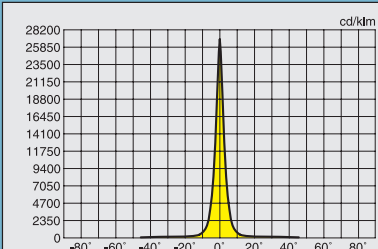

5m	1.5 x 1.5	1277	906	0,71
----	-----------	------	-----	------

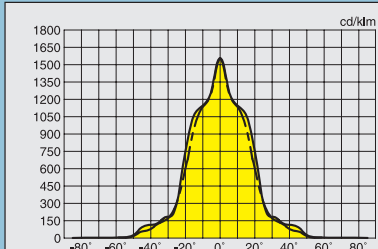

5m	3.5 x 3.5	217	139	0,64
----	-----------	-----	-----	------

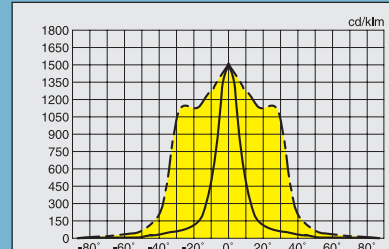

5m	1.5 x 6	220	166	0,76
----	---------	-----	-----	------

